


# COTTON CANVAS

## TECHNICAL SPECIFICATION CC - 15 P



| TEST                                                                                   | RESULT       | UNIT    | TEST METHOD        |
|----------------------------------------------------------------------------------------|--------------|---------|--------------------|
| <b>FABRIC PROPERTIES</b>                                                               |              |         |                    |
| Fiber Content                                                                          | Polyester    | 100%    | ISO 1833-1 : 2006  |
| Warp/Weft Yarn                                                                         | Ringspun     |         |                    |
| Weight                                                                                 | 410          | GSM     | ISO 3801 : 1997    |
| <b>TENSILE STRENGTH</b>                                                                |              |         | ISO 13934-2 : 2014 |
| Warp                                                                                   | 2386         | N       |                    |
| Weft                                                                                   | 1704         | N       |                    |
| <b>TEAR STRENGTH</b>                                                                   |              |         | ISO 13937-1 : 2000 |
| Warp                                                                                   | 368          | N       |                    |
| Weft                                                                                   | 278          | N       |                    |
| <b>RUBBING FASTNESS</b>                                                                |              |         | ISO 105 C06 : 2010 |
| Dry                                                                                    | 3-4          | GRADE   |                    |
| Wet                                                                                    | 3-4          | GRADE   |                    |
| <b>SHRINKAGE</b>                                                                       |              |         | ISO 6330 : 2012    |
| Warp                                                                                   | 1.00         | %       |                    |
| Weft                                                                                   | 0.50         | %       |                    |
| <b>WATER PROOF TEST</b>                                                                |              |         |                    |
| Spray Rating                                                                           | 90           | %       | ISO 7771           |
| Cone Test                                                                              | No Drop      | 24 Hrs. |                    |
| Water Column                                                                           | 250          | MM      | ISO 811 : 2018     |
| <b>LIGHT FASTNESS</b>                                                                  |              |         |                    |
| Light Fastness                                                                         | 4-5          | GRADE   | ISO 105-B02 : 2013 |
| <b>ANTIFUNGUS TEST</b>                                                                 |              |         |                    |
| Fabric passes Soil Burial Test (SO 11721 - 1:2001)& Aspergillus Niger Test (ISO 14119) |              |         |                    |
| <b>WIDTH</b>                                                                           | Upto 200 CMS |         |                    |

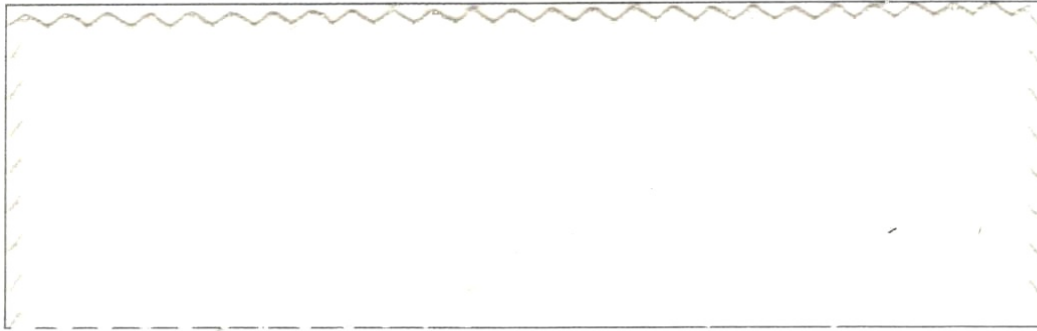

- The Technical specifications mentioned above are average and are therefore susceptible to change..
- The Color swatches are only indicative and not binding.



OLIVE GREEN




BEIGE




TAN



KHAKI



WHITE



GREY




BROWN



RED



ORANGE



P. GREEN